




CUT OUT PARTS

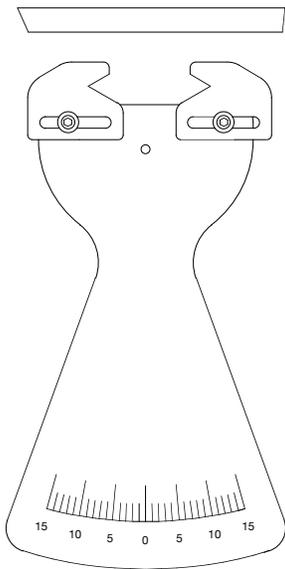

MOUNT BLADE GRIPS

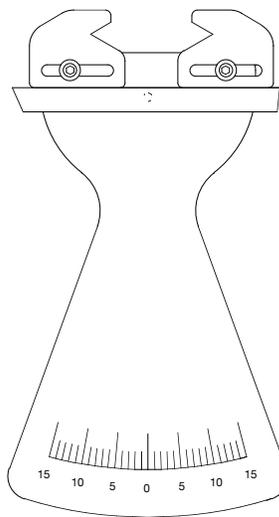


ATTACH GUIDE BLANK

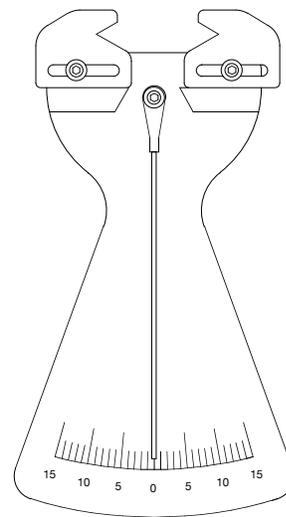


NOTCH AND TRIM GUIDE,  
MOUNT PENDULUM

### MAIN GAUGE BODY

SPRAY MOUNT PATTERN TO PLY, CUT TO SHAPE. CA OR EPOXY SHORT LENGTHS OF NYLON PUSHROD TUBING INTO HOLES. CUT TUBING FLUSH WITH BODY FACE.

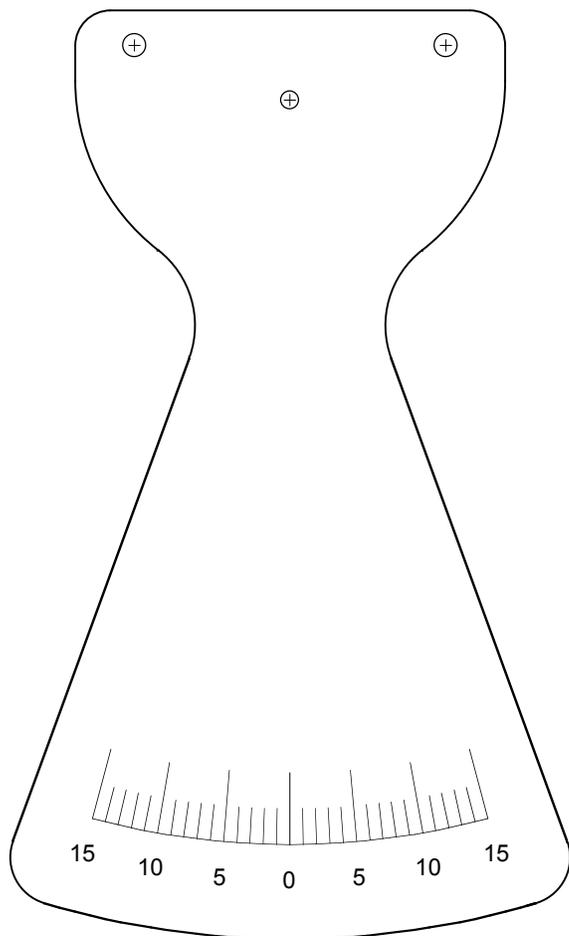

### WOOD PARTS 1/8 PLY

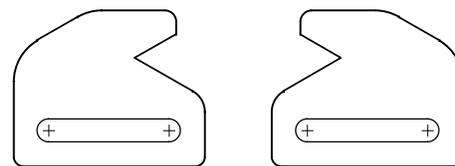

BLADE GRIPS



### BLADE GUIDES

INSTALL AS SINGLE PIECE OF 1/8 x 1/4 USING GRIPS AS GUIDES. TRIM ENDS AND NOTCH CENTER TO CLEAR PENDULUM.

### PENDULUM

ASSEMBLE FROM 2-56 THREADED ROD AND NYLON CLEVIS. TRIM CLEVIS PIN LEG. DRILL FOR LOOSE FIT ON 2-56 SOCKET HEAD CAP SCREW.

THIS PLAN MAY BE PHOTOCOPIED AND ENLARGED  
FOR PERSONAL MODELING USE ONLY  
ALL COMMERCIAL RIGHTS RESERVED

## PENDULUM-STYLE BLADE PITCH GAUGE

DESIGNED BY THAYER SYME

© 2006, MAPLEGATE MEDIA  
AND THAYER SYME

DECEMBER 2006  
ALL RIGHTS RESERVED

DRAWN WITH ASHLAR-VELLUM GRAPHITE